



STEEL BUILDINGS, INC.

## 24 Ga. SUPER SEAM II

### 1. PRODUCT NAME

Whirlwind Building Components  
Architectural Standing Seam Roof System  
24 Ga. Super Seam II



### 2. MANUFACTURER

Whirlwind Building Components

8234 Hansen Road  
Houston, TX 77075  
Phone: (800) 324-9992  
Fax: (832) 553-4700

2175 Sweetwater Industrial Blvd.  
Lithia Springs, GA 30122  
Phone: (800) 363-8142  
Fax: (770) 739-1226

2450 E.L. Anderson Blvd.  
Claremore, OK 74017  
Phone: (877) 875-0077  
Fax: (918) 343-7114

500 Whirlwind Drive  
Freeport, MN 58331  
Phone: (888) 836-7203  
Fax: (320) 836-7201

\*\*\*\*\*

### 3. PRODUCT DESCRIPTION

#### Basic Use:

For roofing new buildings or reroofing existing buildings of any type. Panels are attached to the sub-structure with concealed clips that allow for thermal movement of the panels. Panels are available with a Class 90 UL uplift rating.

The panels are produced with 3" high major ribs at 24" centers (this panel is also available in 12" & 18" widths). The panels come standard in lengths up to 45'-0". This snap together system does not require an electric seamer.



#### Materials:

##### Standard panel material

- 24 Gauge Steel coated both sides with a layer of (Galvalume®) aluminum-zinc alloy (approximately 55% aluminum and 45% zinc) applied by the continuous hot-dip method. Triple spot test per ASTM A-792.

- Trinar colored panels are Galvalume based material. The exterior is given a finish coat of a 70% minimum Kynar 500 PVF formulation, applied over a properly treated and primed surface. The exterior coat is 0.75 mils minimum thickness. The total exterior film thickness including primer is 0.90 to 1.10 mils thick. The interior finish is a pigmented polyester backer or water base primer.

##### Clip Material

- Clips are die formed with a 20 Gauge Galvanized Steel top and a 14 Gauge Steel Base with a Red Oxide finish. The clip base has 4 holes to accommodate attachment to the substrate. The clip top comes with factory installed mastic to match the mastic in the panel.

##### Flashing Material

- The flashing material is the same gauge, color and finish as the panel.

##### Panel Mastic

- Panel side laps have a factory applied hot melt mastic QSO Q41-20 or equivalent containing 99.85% solids by weight.
- Panel endlaps, ridge, gable and eave sealers are butyl-based

tape mastic that is non-staining, non-corrosive, non-volatile and non-toxic. The tape is 100% polyisobutylene-isoprene (butyl rubber) meeting the performance requirements of Federal Specification TT-C1796A Type II Class B. Service temperature is from -40° to +180°F.

- All gutter joints, downspout joints, rake, eave and ridge flashing laps are sealed with Schnee-Morehead SM7100 or equivalent, meeting or exceeding the test requirements of TT-S-00230C, Type II, Class A.



#### Corporate Head Quarters

8234 Hansen Road,  
Houston, TX 77075  
Phone: (800) 324-9992  
www.WhirlwindSteel.com

SUPER SEAM-II DESIGN PROPERTIES								
PANEL GAUGE	F <sub>y</sub> (kSI)	Weight (PSF)	TOP IN COMPRESSION			BOTTOM IN COMPRESSION		
			I <sub>xe</sub> (In. <sup>4</sup> -Ft.)	S <sub>xe</sub> (In. <sup>3</sup> /Ft.)	M <sub>axo</sub> (Kip-In.)	I <sub>xb</sub> (In. <sup>4</sup> -Ft.)	S <sub>xb</sub> (In. <sup>3</sup> /Ft.)	M <sub>axo</sub> (Kip-In.)
26	50	1.02	0.1158	0.0835	2.4997	0.2202	0.0901	2.6987
24	50	1.23	0.1350	0.0951	2.8477	0.2798	0.1153	3.4524
22	50	1.56	0.1837	0.1332	3.9877	0.3640	0.1504	4.5020

**NOTES:**

1. All calculations for the properties of Super Seam-II panels are calculated in accordance with the 2001 edition of the North American Specification For Design Of Cold-Formed Steel Structural Members.
2. I<sub>xe</sub> is for deflection determination.
3. S<sub>xe</sub> is for Bending.
4. M<sub>axo</sub> is allowable bending moment.
5. All values are for the one foot of panel width.

**Fasteners**

- Fasteners for connecting clips to wood are #12 x 1 1/2" Type A wood grips with a hex head (2 per clip).
- Fasteners for connecting clips to purlins are 1/4 - 14 x 1" hex head self drillers (2 per clip).

**Light Gauge Structural System:**

**Basic Use**

Light gauge structural steel secondary framing components for the roofing system including studs, eave struts, cees and zee sections also runners for structural supports at desired roof pitches.

**Composition and Materials**

Studs, cee and zee sections, eave struts and runners are a minimum of 16 gauge steel. All material comes standard with a shop applied red oxide primer. All steel meets or exceeds the requirements of ASTM A 1011 and has minimum yields of 55,000 psi.

\*\*\*\*\*

**4. TECHNICAL DATA**


**Physical Properties:**

**Paint System**


- Specular Gloss (60° Head): ASTM D 523 – 25% to 40%
- Pencil Hardness: ASTM D 3363 - HB.
- Bend Adhesion: ASTM D4145 - 1T - no loss of adhesion.
- Impact Adhesion: ASTM D 2794 - 5/8" steel ball - Impact of 80 inch-pounds - no loss of adhesion.
- Cross Hatch Adhesion: ASTM D 3359 - no loss of adhesion.

**Paint System Field Performance**

- Film integrity: 35 years with no blistering, peeling or cracking.

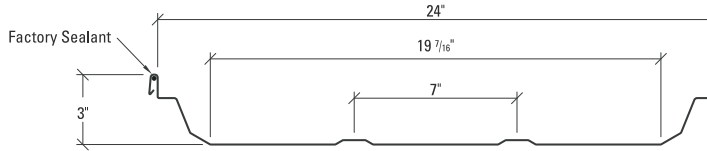

**Super Seam-II Snap-Lock Standing Seam Roof Panel**

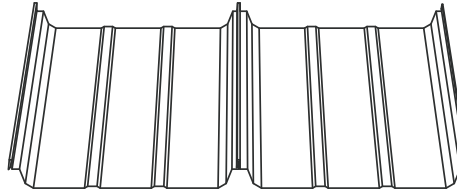

Two Panels Show Above

- Chalk Resistance: ASTM D 4214-3000 hours-Weatherometer-rating no greater than #8.
- Color Change: ASTM D 2244-3000 hours-Weatherometer - no more than 2 NBS units.

\*\*\*\*\*

**5. INSTALLATION**

The minimum roof slope shall be no less than 1/8:12. Panels are joined at the sidelaps with an interlocking seam standing 3" above the roof plane. Sidelaps have factory applied mastic sealer and are snapped together without the use of a seaming tool. Installation is in conjunction with light gauge structural framing or a solid substrate.

\*\*\*\*\*

**6. AVAILABILITY AND COST**

Whirlwind Building Components  
8234 Hansen Road  
Houston, TX 77075  
Phone: (800) 324-9992

\*\*\*\*\*

**7. WARRANTY**

Available warranties include 25 year base material and 20 year weather tightness, providing for repair or stoppage of any leaks caused by normal wear and tear. Finish warranties up to 35 years also are available.

\*\*\*\*\*

**8. MAINTENANCE**

Only normal routine maintenance is required. Roofs should be inspected yearly and gutters cleaned as needed.

\*\*\*\*\*

**9. TECHNICAL SERVICES**

Whirlwind Building Components  
8234 Hansen Road  
Houston, TX 77075  
Phone: (800) 324-9992  
Website: www.WhirlwindSteel.com

\*\*\*\*\*

**10. FILING SYSTEMS**

Galvalume® is a registered trademark of BIEC International, Inc.

Kynar 500® is a registered trademark of Elf Autochem North America, Inc.

