



SUPER SPAN



Super Span can be used for wall and roof applications. It is available in 26, 24, and 22 gauge.

- UL Construction No. 30, 79, 161,167
- UL 580 Up-Lift tested / Class 90 Rated

- UL 2218 Hail Impact Resistant Tested
- Inclined: Unlimited / Impact Class 4
- Texas Department of Insurance*
- Florida Product Approval*
- Dade County NOA*



Hangar | Building Project

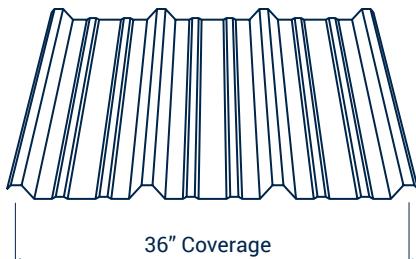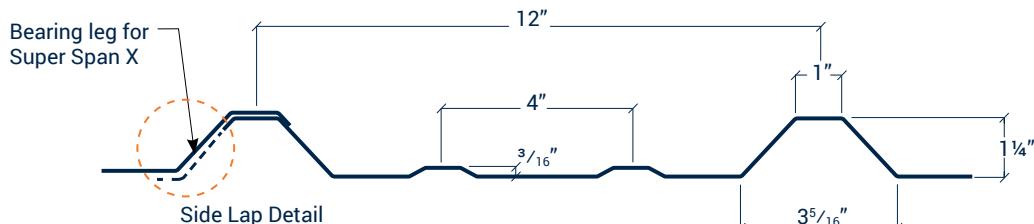

PANEL GAUGE	F _y (KSI)	WT (PSF)	DESIGN PROPERTIES			
			TOP IN COMPRESSION	BOTTOM IN COMPRESSION	I _x (In ⁴ ·Ft)	M _a (Kip·In/Ft)
26	60*	0.86	0.0360	1.2817	0.0310	1.6267
24	50	1.09	0.0553	1.6873	0.0450	1.8243
22	50	1.35	0.0773	2.4133	0.0610	2.3667

*Actual F_y is higher than 60 ksi but is limited by the code.

NOTES:

1. All section properties are calculated in accordance with the North American Specification For Design Of Cold-Formed Steel Structural Members.